


RT REINFORCED SINGLE CARCASS 15 bar 1000 Series **Reeling Hose**

Type 1620 F RT **Mainline Hose**

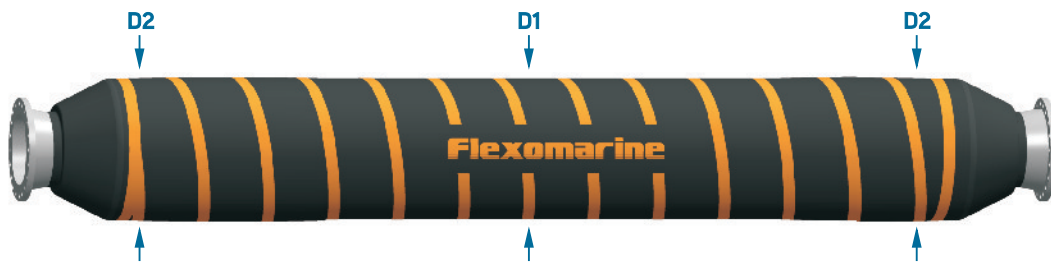

| Nominal Bore (mm) | Outside Diameter (mm) |        | Weight in Air Empty (kg)             |              |              | Minimum Bending Radius (m) |
|-------------------|-----------------------|--------|--------------------------------------|--------------|--------------|----------------------------|
|                   | D1 Body               | D2 End | Weight in Air Full of Sea Water (kg) |              |              |                            |
|                   |                       |        | 9.1m (30ft)                          | 10.7m (35ft) | 12.2m (40ft) |                            |
| 300 (12")         | 600                   | 620    | 1337<br>2005                         | 1521<br>2306 | 1693<br>2589 | 1.8                        |
| 400 (16")         | 760                   | 780    | 1905<br>2991                         | 2168<br>3444 | 2414<br>3869 | 2.4                        |
| 500 (20")         | 890                   | 910    | 2569<br>4292                         | 2926<br>4952 | 3261<br>5571 | 3.0                        |
| 600 (24")         | 1040                  | 1060   | 3352<br>5859                         | 3829<br>6777 | 4276<br>7637 | 3.6                        |

- Single Carcass Hose FLEXOMARINE Mainline to be used as the main floating hose in the string
- Rated Working Pressure: 15 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% or as requested
- Electrical Continuity: Continuous or as requested