


Type 1640 F RT Tail Hose

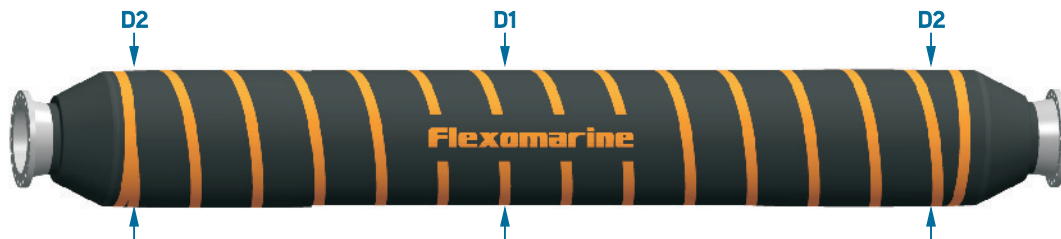

Nominal Bore (mm)	Outside Diameter (mm)		Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End	Weight in Air Full of Sea Water (kg)			
			9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
300 (12")	600	620	1397 2065	1594 2379	1778 2674	1.8
400 (16")	760	780	1924 3010	2191 3468	2442 3898	2.4
500 (20")	890	910	2559 4282	2917 4943	3252 5562	3.0
600 (24")	1040	1060	3577 6084	3975 6923	4372 7733	3.6

- Single Carcass Hose FLEXOMARINE Tail for use to connect the end connection hose and the main floating string
- This hose has flexibility enough to support seawater conditions during offloading
- Rated Working Pressure: 15 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% or as requested
- Electrical Continuity: Discontinuous or as requested