


RT REINFORCED SINGLE CARCASS 15 bar 1000 Series **Reeling Hose**

Type 1670 BC RT **Buoyancy Control Hose**

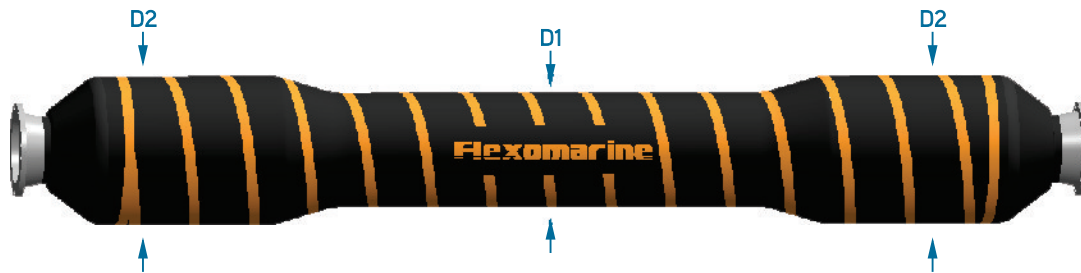

Nominal Bore (mm)	Outside Diameter (mm)		Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End	Weight in Air Full of Sea Water (kg)			
			9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
300 (12")	500	620	1300 1968	1478 2263	1644 2540	1.8
400 (16")	610	780	1865 2951	2120 3397	2360 3815	2.4
500 (20")	710	910	2500 4223	2844 4870	3167 5477	3.0
600 (24")	840	1060	3284 5791	3748 6696	4183 7544	3.6

- Single Carcass Hose FLEXOMARINE Buoyancy Control for use as the second and third hose in the string
- Rated Working Pressure: 15 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: Neutral or as requested
- Electrical Continuity: Continuous or as requested