


Type 1710 F RT First Off FPSO HOSE

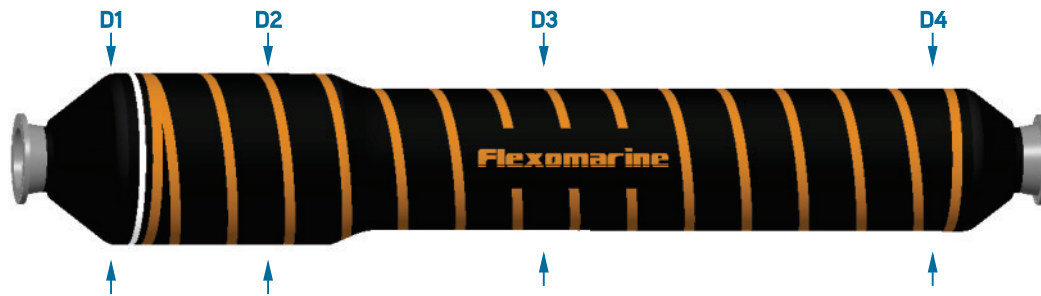

| Nominal Bore (mm) | Outside Diameter (mm) | | | | Weight in Air Empty (kg) | | | Minimum Bending Radius (m) |
|-------------------|-----------------------|------------|------------|-----------|--------------------------------------|-----------------|-----------------|----------------------------|
| | D1 End | D2 Body | D3 Body | D4 End | Weight in Air Full of Sea Water (kg) | | | |
| | | | | | 9.1m (30ft) | 10.7m (35ft) | 12.2m (40ft) | |
| 300 (12") | 800 | 730 | 630 | 650 | 1797 2465 | 2056 2842 | 2299 3195 | 1.8 |
| 400 (16") | 960 | 890 | 790 | 810 | 2437 3523 | 2785 4061 | 3110 4566 | 2.4 |
| 500 (20") | 1090 | 1020 | 920 | 940 | 3158 4881 | 3607 5633 | 4028 6338 | 3.0 |
| 600 (24") | 1220 | 1200 | 1060 | 1080 | 4167 6674 | 4771 7719 | 5338 8699 | 3.6 |

- Single Carcass Hose FLEXOMARINE One End Reinforced to be used in the FPSO Offloading connection
- Identified by one circumferential white band at the reinforced end
- The hose can be supplied with reinforcement at both ends or fully reinforced
- Rated Working Pressure: 19 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% including the weight of ancillary equipment or as requested
- Electrical Continuity: Continuous or as requested