


RT REINFORCED SINGLE CARCASS 19 bar 1000 Series **Reeling Hose**

Type 1720 F RT **Mainline Hose**

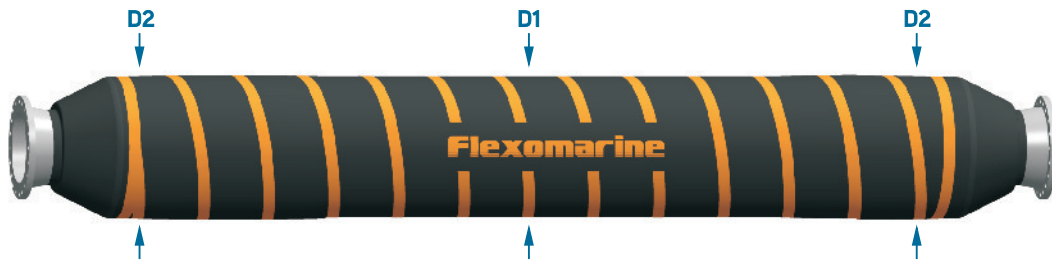

Nominal Bore (mm)	Outside Diameter (mm)		Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End	Weight in Air Full of Sea Water (kg)			
			9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
300 (12")	630	650	1431 2100	1622 2407	1800 2696	1.8
400 (16")	790	810	2084 3170	2364 3640	2626 4082	2.4
500 (20")	920	940	2754 4477	3126 5152	3475 5785	3.0
600 (24")	1060	1080	3679 6186	4192 7140	4673 8034	3.6

- Single Carcass Hose FLEXOMARINE Mainline to be used as the main floating hose in the string
- Rated Working Pressure: 19 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% or as requested
- Electrical Continuity: Continuous or as requested