


RT REINFORCED SINGLE CARCASS 19 bar 1000 Series **Reeling Hose**

Type 1740 F RT **Tail Hose**

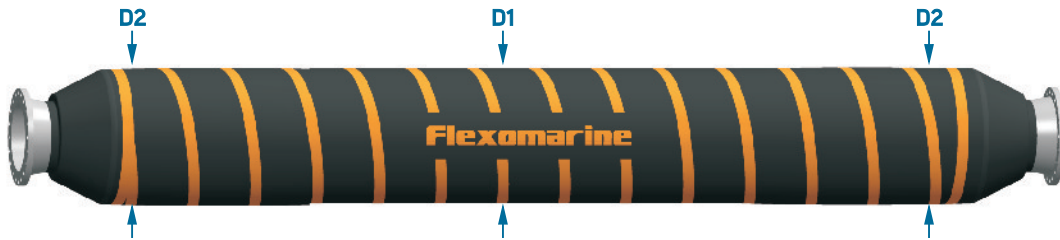

Nominal Bore (mm)	Outside Diameter (mm)		Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End	Weight in Air Full of Sea Water (kg)			
			9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
300 (12")	630	650	1562 2230	1777 2562	1978 2874	1.8
400 (16")	790	810	2160 3246	2456 3732	2733 4188	2.4
500 (20")	920	940	2822 4545	3208 5234	3571 5881	3.0
600 (24")	1060	1080	3675 6182	4188 7136	4669 8030	3.6

- Single Carcass Hose FLEXOMARINE Tail for use to connect end connection hose and the main floating string
- This hose has flexibility enough to support seawater conditions during offloading
- Rated Working Pressure: 19 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% or as requested
- Electrical Continuity: Discontinuous or as requested