


RT REINFORCED SINGLE CARCASS 21 bar 1000 Series **Reeling Hose**

Type 1820 F RT **Mainline Hose**

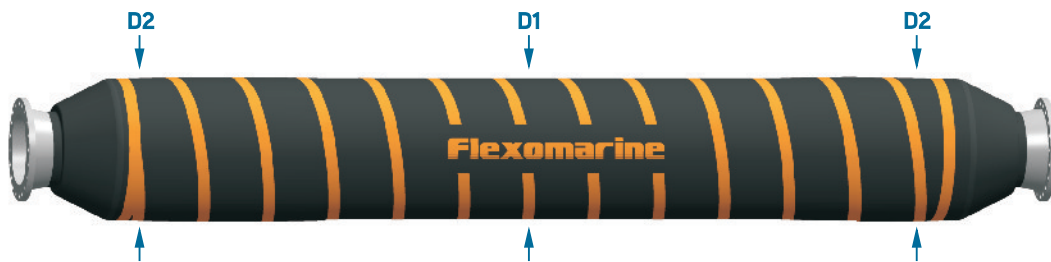

Nominal Bore (mm)	Outside Diameter (mm)		Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End	Weight in Air Full of Sea Water (kg)			
			9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
300 (12")	630	650	1476 2144	1672 2457	1856 2751	1.8
400 (16")	790	810	2148 3234	2437 3714	2707 4163	2.4
500 (20")	920	940	2839 4562	3222 5249	3582 5892	3.0
600 (24")	1060	1080	3793 6300	4322 7270	4818 8179	3.6

- Single Carcass Hose FLEXOMARINE Mainline to be used as the main floating hose in the string
- Rated Working Pressure: 21 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% or as requested
- Electrical Continuity: Continuous or as requested