


RT DOUBLE CARCASS 15 bar 7000 Series

Reeling Hose

Type 7632 S RT Mainline Hose

FLEXOMARINE SAFE

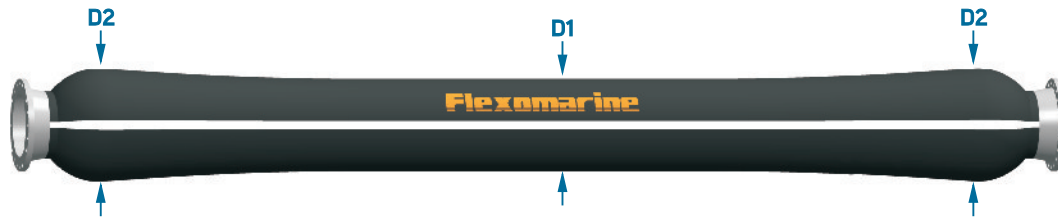

Nominal Bore (mm)	Outside Diameter (mm)		Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End	Submerged Weight Full of Sea Water (kg)			
			9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
300 (12")	480	700	1784 588	2009 602	2220 635	1.2
400 (16")	570	800	2368 813	2663 862	2940 909	1.6
500 (20")	685	900	3014 1036	3403 1105	3767 1171	2.0
600 (24")	820	1050	4167 1432	4726 1539	5249 1639	2.4

- Double Carcass Hose FLEXOMARINE SAFE Mainline Submarine Hose for use as the main submarine hose in the string to be connected between reel and the Tanker on reeling systems
- Rated Working Pressure: 15 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested
- Leak Detection: In case of failure of the primary carcass, a rod installed in each hose end, that is initially embedded will become visible after the burst of the primary carcass giving confirmation of the failure.