


RT DOUBLE CARCASS 19 bar 7000 Series

Reeling Hose

Type 7732 S RT Mainline Hose

FLEXOMARINE SAFE

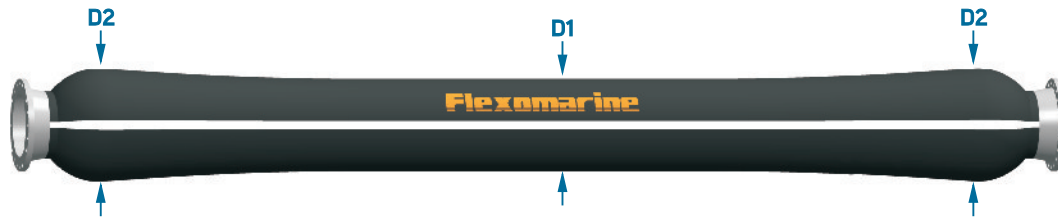

Nominal Bore (mm)	Outside Diameter (mm)		Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End	9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
300 (12")	490	700	1809 561	2042 595	2261 628	1.2
400 (16")	590	800	2439 811	2752 862	3046 909	1.6
500 (20")	700	900	3129 1058	3538 1129	3921 1196	2.0
600 (24")	830	1050	4217 1449	4783 1556	5314 1657	2.4

- Double Carcass Hose FLEXOMARINE Mainline Submarine Hose for use as the main submarine hose in the string to connect between reel and Tanker on reeling systems
- Rated Working Pressure: 19 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested
- Leak Detection: In case of failure of the primary carcass, a rod installed in each hose end, that is initially embedded will become visible after the burst of the primary carcass giving confirmation of the failure.