


FLOATING SINGLE CARCASS 15 bar 1000 Series

Type 1640F Tail Hose

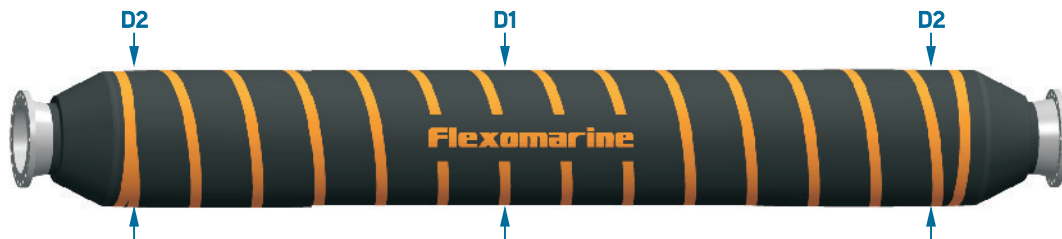

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End			Weight in Air Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
150 (6")	370	390	-	-	594 763	677 876	755 982	0.9
200 (8")	420	450	-	-	762 1058	868 1216	966 1363	1.2
250 (10")	505	540	-	-	1020 1474	1158 1692	1288 1897	1.5
300 (12")	565	600	-	-	1291 1959	1466 2252	1630 2526	1.8
400 (16")	710	750	-	-	1797 2883	2036 3313	2260 3716	2.4
500 (20")	845	890	-	-	2394 4117	2715 4741	3016 5326	3.0

- Single Carcass Hose FLEXOMARINE Tail for use to connect the tanker rail hose and the floating string
- This hose has flexibility enough to support seawater conditions during offloading
- Rated Working Pressure: 15 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% or as requested
- Electrical Continuity: Discontinuous or as requested