


FLOATING SINGLE CARCASS 19 bar 1000 Series

Type 1720F Mainline Hose

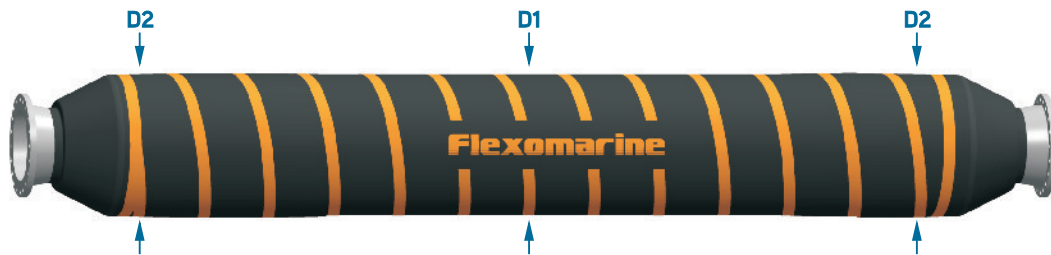

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End			Weight in Air Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
150 (6")	360	385	-	-	571 740	650 849	724 951	0.9
200 (8")	420	450	-	-	757 1053	862 1210	959 1356	1.2
250 (10")	505	540	-	-	1017 1471	1154 1688	1284 1893	1.5
300 (12")	560	595	-	-	1214 1882	1375 2161	1526 2421	1.8
400 (16")	710	750	-	-	1771 2857	2005 3282	2225 3681	2.4
500 (20")	845	890	-	-	2379 4102	2697 4724	2996 5306	3.0
600 (24")	995	1040	-	-	3175 5682	3610 6558	4018 7379	3.6

- Single Carcass Hose FLEXOMARINE Mainline for use as the main floating hose in the string
- Rated Working Pressure: 19 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% or as requested
- Electrical Continuity: Continuous or as requested