


SUBMARINE SINGLE CARCASS 19 bar 1000 Series

Type 1721S One Reinforced End Hose With Location Collars

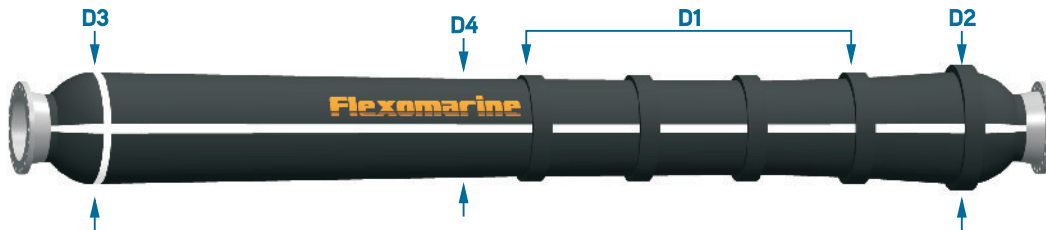

Nominal Bore (mm)	Outside Diameter (mm)					Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	Collar		D3 End	D4 Body	Submerged Weight Full of Sea Water (kg)			
		D2 End	Hose			9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
150 (6")	310	420	350	275	610 197	698 221	776 242	0.6	
200 (8")	370	471	415	335	818 268	936 300	1041 329	0.8	
250 (10")	420	581	475	390	1076 370	1227 412	1362 450	1.0	
300 (12")	471	581	535	445	1346 515	1535 574	1706 629	1.2	
400 (16")	581	697	630	540	1848 751	2103 835	2330 912	1.6	
500 (20")	697	799	745	650	2449 1022	2789 1138	3093 1245	2.0	
600 (24")	799	946	860	765	3184 1375	3627 1537	4029 1687	2.4	

- Single Carcass Hose FLEXOMARINE One Reinforced End Submarine Hose for use to connect sea bed manifold or buoy connection used on monobuoy systems
- Supplied with float location collars
- Rated Working Pressure: 19 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested