


SUBMARINE SINGLE CARCASS 21 bar 1000 Series

Type 1832S Mainline Hose

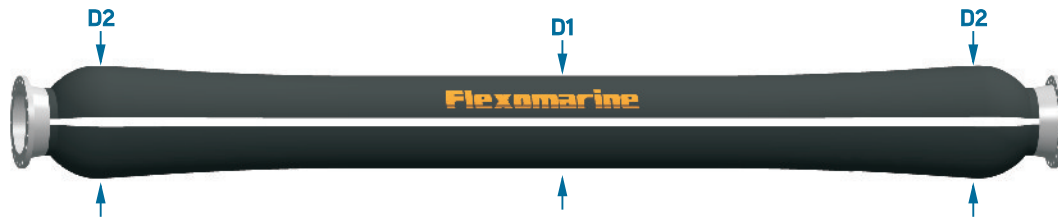

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End			Submerged Weight Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
150 (6")	255	345	-	-	545 173	617 189	685 205	0.6
200 (8")	310	400	-	-	709 231	803 252	891 273	0.8
250 (10")	365	465	-	-	943 324	1066 353	1181 380	1.0
300 (12")	425	530	-	-	1249 465	1414 510	1569 553	1.2
400 (16")	520	625	-	-	1718 684	1940 748	2149 808	1.6
500 (20")	630	740	-	-	2294 930	2593 1019	2874 1101	2.0
600 (24")	750	860	-	-	3066 1260	3478 1387	3864 1507	2.4

- Single Carcass Hose FLEXOMARINE Mainline Submarine Hose for use as the main submarine hose in the string to connect between sea bed manifold and buoy connection used on monobuoy systems
- Rated Working Pressure: 21 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested