


FLOATING SINGLE CARCASS 21 bar 1000 Series

Type 1840F Tail Hose

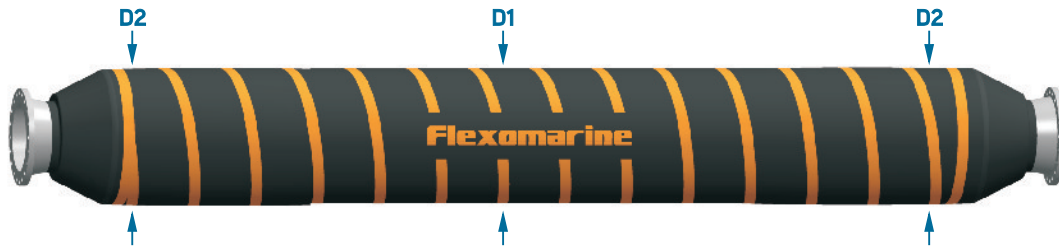

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End			Weight in Air Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
150 (6")	375	400	-	-	621 790	708 907	790 1017	0.9
200 (8")	425	455	-	-	794 1090	905 1253	1008 1405	1.2
250 (10")	510	545	-	-	1056 1510	1201 1735	1336 1945	1.5
300 (12")	575	610	-	-	1373 2042	1563 2349	1741 2636	1.8
400 (16")	720	760	-	-	1816 2982	2153 3430	2394 3849	2.4
500 (20")	855	900	-	-	2512 4235	2854 4881	3175 5485	3.0

- Single Carcass Hose FLEXOMARINE Tail for use to connect the tanker rail hose and the floating string
- This hose has flexibility enough to support seawater conditions during offloading
- Rated Working Pressure: 21 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% or as requested
- Electrical Continuity: Discontinuous or as requested