


RT REINFORCED SINGLE CARCASS 15 bar 1000 Series **Reeling Hose**

Type 1635 S RT **Tanker End Hose**

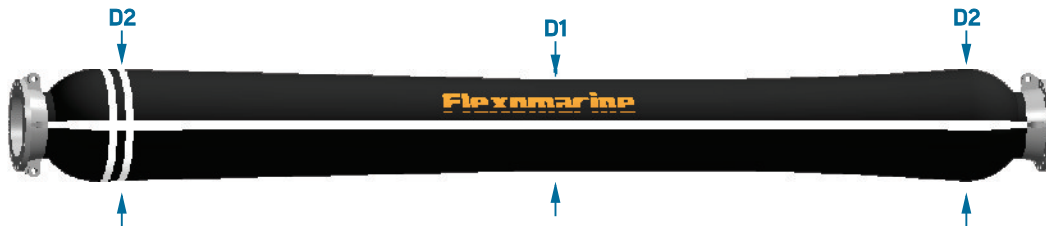

Nominal Bore (mm)	Outside Diameter (mm)		Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 End	D2 Body	Submerged Weight Full of Sea Water (kg)			
			9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
300 (12")	430	650	1261 439	1430 485	1588 529	1.2
400 (16")	540	750	1727 645	1955 711	2170 772	1.6
500 (20")	640	850	2315 878	2624 969	2913 1055	2.0
600 (24")	755	890	3098 1188	3526 1321	3927 1446	2.4

- Single Carcass Hose FLEXOMARINE Tanker End Submarine Hose for use to facilitate lifting up the string
- Identified by a double circumferential white bands at the tanker end
- This hose is extremely flexible to support the curvature demanded during offloading
- In the hose fittings are welded lifting lugs
- Each lug are tested to support Safe Working Loads as follow:
12" = 100 kN 16" = 150 kN 20" = 200 kN
- Rated Working Pressure: 15 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested