


RT REINFORCED SINGLE CARCASS 21 bar 1000 Series **Reeling Hose**

Type 1870 BC RT **Buoyancy Control Hose**

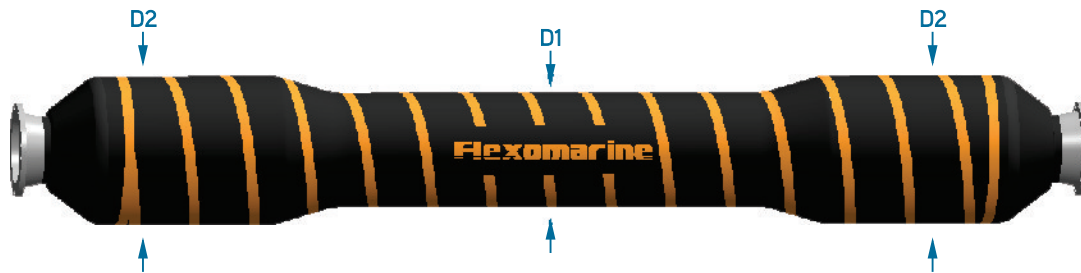

Nominal Bore (mm)	Outside Diameter (mm)		Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End	Weight in Air Full of Sea Water (kg)			
			9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
300 (12")	510	650	1438 2107	1628 2414	1806 2701	1.8
400 (16")	620	810	2082 3168	2359 3636	2619 4074	2.4
500 (20")	720	940	2747 4471	3114 5141	3459 5769	3.0
600 (24")	850	1080	3693 6201	4204 7152	4682 8044	3.6

- Single Carcass Hose FLEXOMARINE Buoyancy Control for use as the second and third hose in the string
- Rated Working Pressure: 21 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: Neutral or as requested
- Electrical Continuity: Continuous or as requested