


FLOATING SINGLE CARCASS 15 bar 1000 Series

Type 1610F First Off Buoy Hose

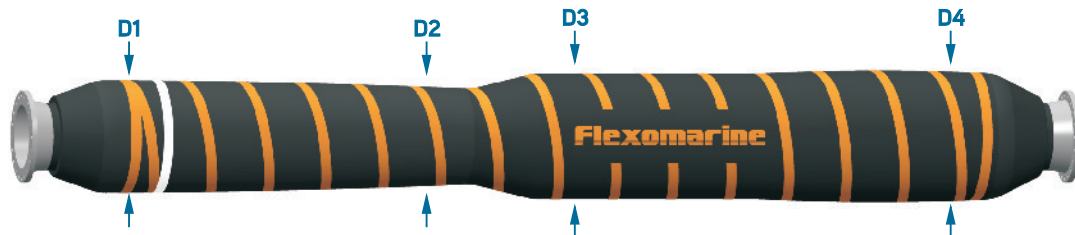

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 End	D2 Body	D3 Body	D4 End	Weight in Air Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
150 (6")	335	280	360	380	602 771	691 890	774 1001	0.9
200 (8")	400	335	450	470	813 1109	932 1280	1045 1442	1.2
250 (10")	460	390	530	560	1073 1527	1227 1761	1371 1980	1.5
300 (12")	530	455	590	630	1380 2048	1580 2365	1767 2663	1.8
400 (16")	620	515	735	775	1872 2958	2139 3415	2388 3844	2.4
500 (20")	740	600	845	890	2458 4181	2808 4834	3136 5446	3.0
600 (24")	855	720	1015	1060	3263 5770	3736 6684	4180 7541	3.6

- Single Carcass Hose FLEXOMARINE One End Reinforced for use in the first off the buoy position
- Identified by one circumferencial white band at the reinforced end
- The hose can be supplied with reinforcement at both ends or fully reinforced
- Rated Working Pressure: 15 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 5% or as requested
- Electrical Continuity: Continuous or as requested