


FLOATING SINGLE CARCASS 15 bar 1000 Series

Type 1620F Mainline Hose

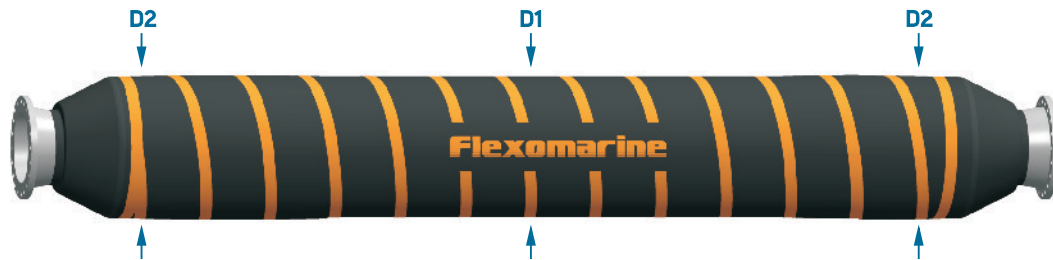

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End			Weight in Air Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
150 (6")	360	385	-	-	571 740	650 849	724 951	0.9
200 (8")	415	445	-	-	727 1023	826 1174	918 1315	1.2
250 (10")	500	535	-	-	981 1435	1113 1647	1236 1845	1.5
300 (12")	555	590	-	-	1174 1842	1328 2113	1472 2368	1.8
400 (16")	705	745	-	-	1723 2809	1949 3226	2161 3617	2.4
500 (20")	840	885	-	-	2322 4045	2630 4656	2919 5229	3.0
600 (24")	985	1035	-	-	3104 5611	3527 6475	3923 7284	3.6

- Single Carcass Hose FLEXOMARINE Mainline for use as the main floating hose in the string
- Rated Working Pressure: 15 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% or as requested
- Electrical Continuity: Continuous or as requested