


SUBMARINE SINGLE CARCASS 15 bar 1000 Series

Type 1621S One Reinforced End Hose With Location Collars

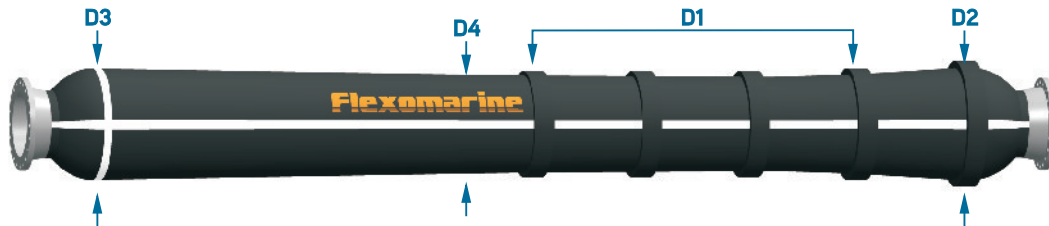

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	Collar		D4 Body	Submerged Weight Full of Sea Water (kg)			
		D2 End	D3 End		9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
150 (6")	310	420	350	275	610 197	698 221	776 242	0.6
200 (8")	370	471	405	330	788 262	902 293	1001 321	0.8
250 (10")	420	581	470	385	1043 364	1188 404	1317 441	1.0
300 (12")	471	581	530	440	1308 507	1490 565	1654 619	1.2
400 (16")	581	697	625	535	1803 744	2050 826	2269 901	1.6
500 (20")	697	799	740	645	2396 1013	2726 1127	3020 1232	2.0
600 (24")	799	946	855	755	3118 1360	3551 1520	3940 1668	2.4

- Single Carcass Hose FLEXOMARINE One Reinforced End Submarine Hose for use to connect sea bed manifold or buoy connection used on monobuoy systems
- Supplied with float location collars
- Rated Working Pressure: 15 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested