


SUBMARINE SINGLE CARCASS 15 bar 1000 Series

Type 1632S Mainline Hose

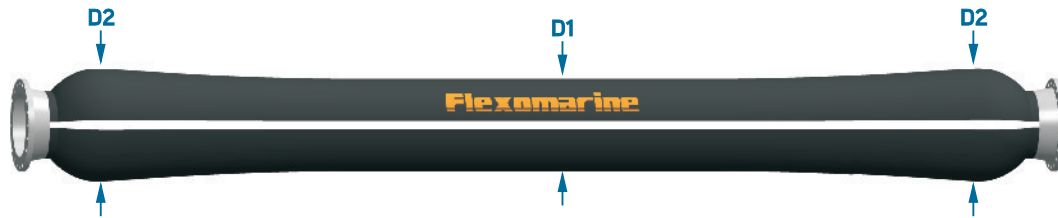

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End			Submerged Weight Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
150 (6")	250	340	-	-	519 168	587 184	651 199	0.6
200 (8")	305	395	-	-	678 225	767 246	850 266	0.8
250 (10")	360	460	-	-	908 318	1025 346	1135 373	1.0
300 (12")	415	520	-	-	1169 452	1320 495	1461 536	1.2
400 (16")	505	615	-	-	1621 669	1826 731	2019 788	1.6
500 (20")	620	730	-	-	2178 912	2457 997	2718 1077	2.0
600 (24")	730	840	-	-	2860 1226	3235 1348	3585 1462	2.4

- Single Carcass Hose FLEXOMARINE Mainline Submarine Hose for use as the main submarine hose in the string to connect between sea bed manifold and buoy connection used on monobuoy systems
- Rated Working Pressure: 15 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested