


FLOATING SINGLE CARCASS 15 bar 1000 Series

Type 1670BC Buoyancy Control Hose

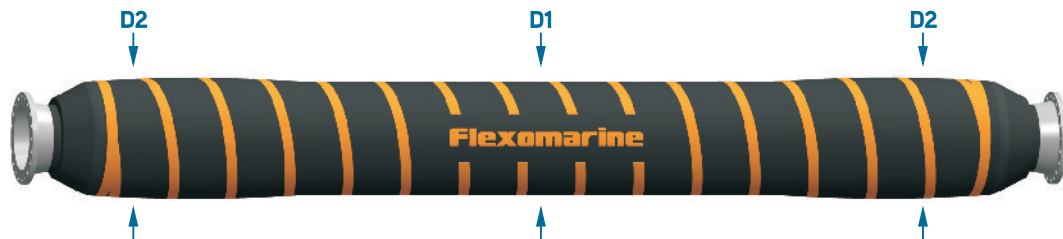

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End			Weight in Air Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
150 (6")	305	325	-	-	517 686	589 788	658 884	0.9
200 (8")	370	415	-	-	696 992	793 1141	885 1282	1.2
250 (10")	445	510	-	-	943 1397	1072 1606	1193 1802	1.5
300 (12")	510	545	-	-	1161 1829	1319 2105	1468 2364	1.8
400 (16")	625	665	-	-	1665 2751	1893 3170	2107 3562	2.4
500 (20")	735	780	-	-	2232 3955	2539 4565	2827 5137	3.0
600 (24")	885	900	-	-	2985 5492	3407 6355	3803 7164	3.6

- Single Carcass Hose FLEXOMARINE Buoyancy Control for use as the second and third hose in the string
- Rated Working Pressure: 15 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: Neutral or as requested
- Electrical Continuity: Continuous or as requested