


## SUBMARINE SINGLE CARCASS 19 bar 1000 Series

### Type 1732S Mainline Hose

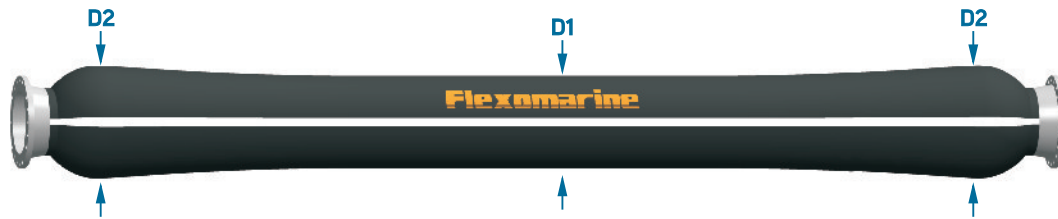

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End			Submerged Weight Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
150 (6")	250	340	-	-	519 168	587 184	651 199	0.6
200 (8")	310	400	-	-	709 231	803 252	891 273	0.8
250 (10")	365	465	-	-	943 324	1066 353	1181 380	1.0
300 (12")	420	525	-	-	1209 459	1367 504	1515 545	1.2
400 (16")	515	620	-	-	1668 676	1882 738	2082 797	1.6
500 (20")	625	735	-	-	2234 920	2523 1007	2794 1088	2.0
600 (24")	735	860	-	-	2930 1238	3316 1362	3679 1478	2.4

- Single Carcass Hose FLEXOMARINE Mainline Submarine Hose for use as the main submarine hose in the string to connect between sea bed manifold and buoy connection used on monobuoy systems
- Rated Working Pressure: 19 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested