


FLOATING SINGLE CARCASS 19 bar 1000 Series

Type 1770BC Buoyancy Control Hose

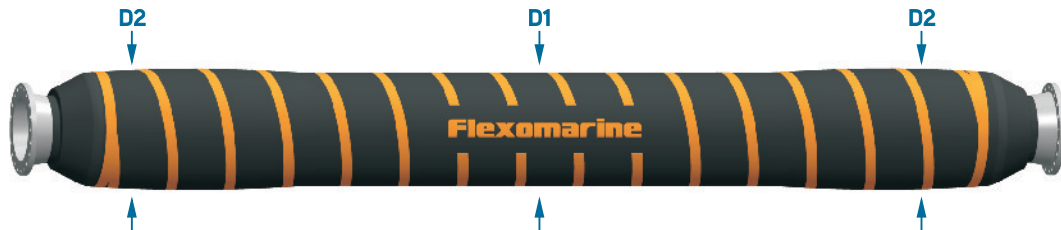

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End			Weight in Air Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
150 (6")	310	345	-	-	565 734	640 839	710 937	0.9
200 (8")	370	435	-	-	728 1024	823 1171	913 1310	1.2
250 (10")	450	525	-	-	996 1450	1127 1661	1249 1858	1.5
300 (12")	515	565	-	-	1246 1914	1410 2196	1564 2460	1.8
400 (16")	640	690	-	-	1803 2889	2043 3320	2268 3724	2.4
500 (20")	750	805	-	-	2379 4103	2697 4724	2995 5306	3.0
600 (24")	905	930	-	-	3257 5764	3707 6655	4129 7491	3.6

- Single Carcass Hose FLEXOMARINE Buoyancy Control for use as the second and third hose in the string
- Rated Working Pressure: 19 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: Neutral or as requested
- Electrical Continuity: Continuous or as requested