


FLOATING SINGLE CARCASS 21 bar 1000 Series

Type 1820F Mainline Hose

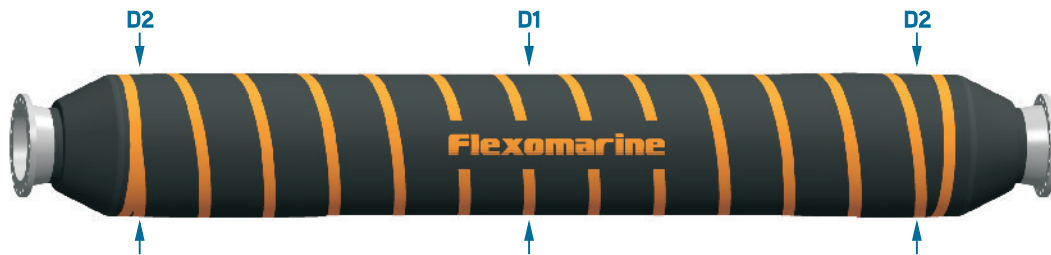

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End			Weight in Air Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
150 (6")	370	390	-	-	597 766	680 879	758 985	0.9
200 (8")	420	450	-	-	757 1053	862 1210	959 1356	1.2
250 (10")	505	540	-	-	1017 1471	1154 1688	1284 1893	1.5
300 (12")	565	605	-	-	1253 1921	1421 2207	1578 2474	1.8
400 (16")	715	755	-	-	1821 2906	2064 3341	2292 3748	2.4
500 (20")	850	895	-	-	2439 4162	2768 4794	3077 5387	3.0
600 (24")	1005	1050	-	-	3314 5821	3774 6722	4205 7567	3.6

- Single Carcass Hose FLEXOMARINE Mainline for use as the main floating hose in the string
- Rated Working Pressure: 21 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% or as requested
- Electrical Continuity: Continuous or as requested