


SUBMARINE SINGLE CARCASS 21 bar 1000 Series

Type 1821S One Reinforced End Hose With Location Collars

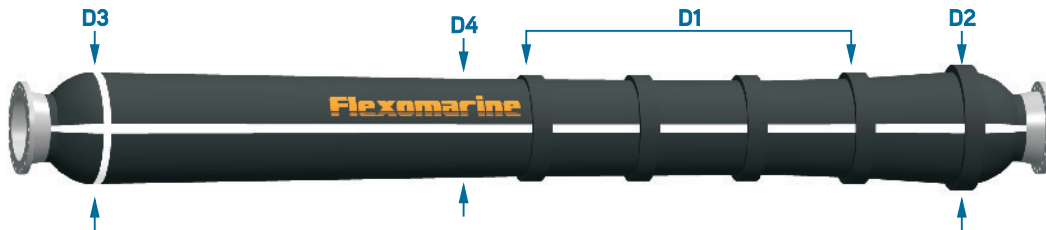

Nominal Bore (mm)	Outside Diameter (mm)					Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	Collar		D3 End	D4 Body	Submerged Weight Full of Sea Water (kg)			
		D2 End	Hose			9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
150 (6")	310	420	355	280	635 202	727 227	809 249	0.6	
200 (8")	370	471	415	335	818 268	936 300	1041 329	0.8	
250 (10")	420	581	475	390	1076 370	1227 412	1362 450	1.0	
300 (12")	471	581	540	455	1384 521	1580 582	1757 638	1.2	
400 (16")	581	697	635	545	1895 761	2158 846	2393 925	1.6	
500 (20")	697	799	750	655	2505 1034	2854 1151	3169 1260	2.0	
600 (24")	799	946	870	775	3311 1399	3778 1566	4203 1720	2.4	

- Single Carcass Hose FLEXOMARINE One Reinforced End Submarine Hose for use to connect sea bed manifold or buoy connection used on monobuoy systems
- Supplied with float location collars
- Rated Working Pressure: 21 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested